

DL-888D

DL-888T

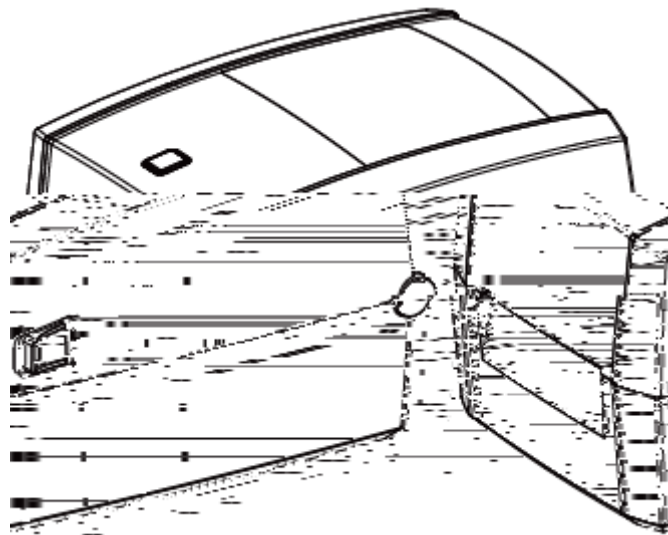


	1
	2
1	2
2	2
3	3
4	4
	5
1	8
1.1	8
1.2	9
1.3	10
2	11
3	13
3.1	13
3.1.1	13
3.1.2	16
3.1.3	18
3.1.4	(DL-888T).....	19
3.2	21
3.3	22
3.4	22
3.5	23
3.6	24
3.6.1	/	24


3.6.2	24
3.6.3	24
3.6.4	25
3.6.5	25
4	28
1:	29

✖

1

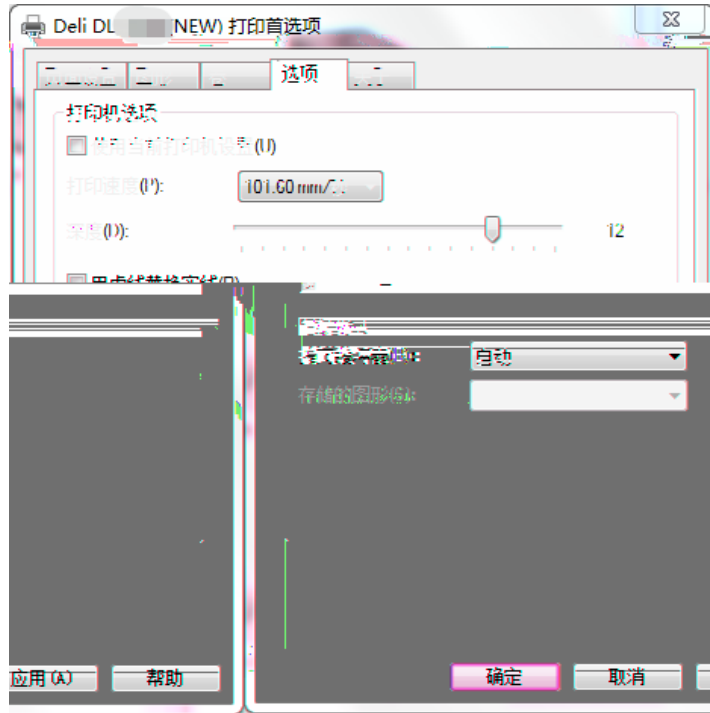

2

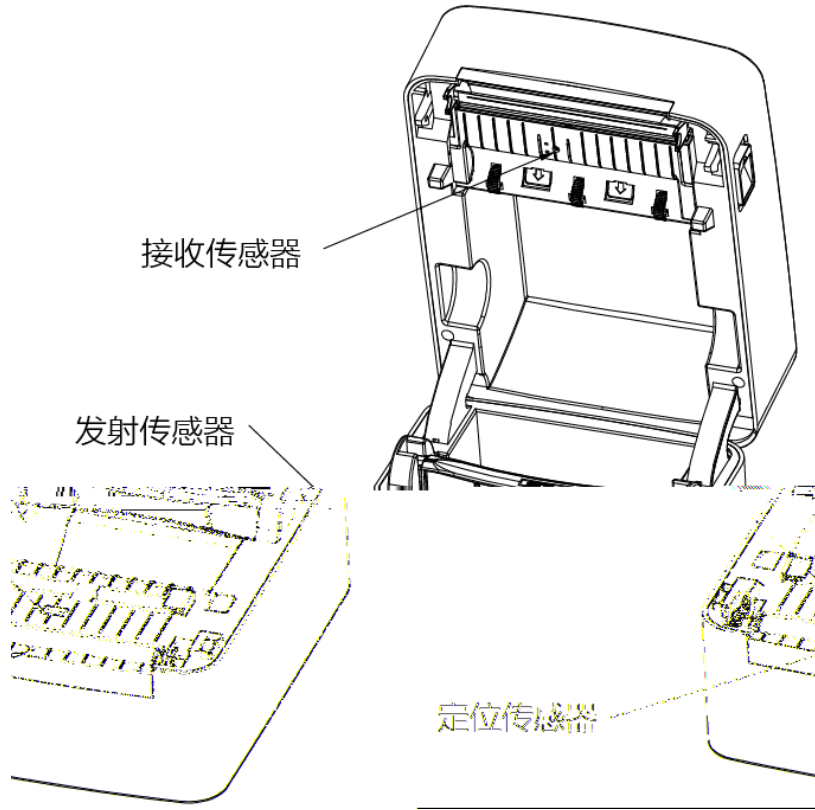

3

1

2

2~3

3

4

1

2

1 2



.



1

2

3

4

5



1

2

3

4

5


6

-
-
-
-
-


-
-
-
-



1.2

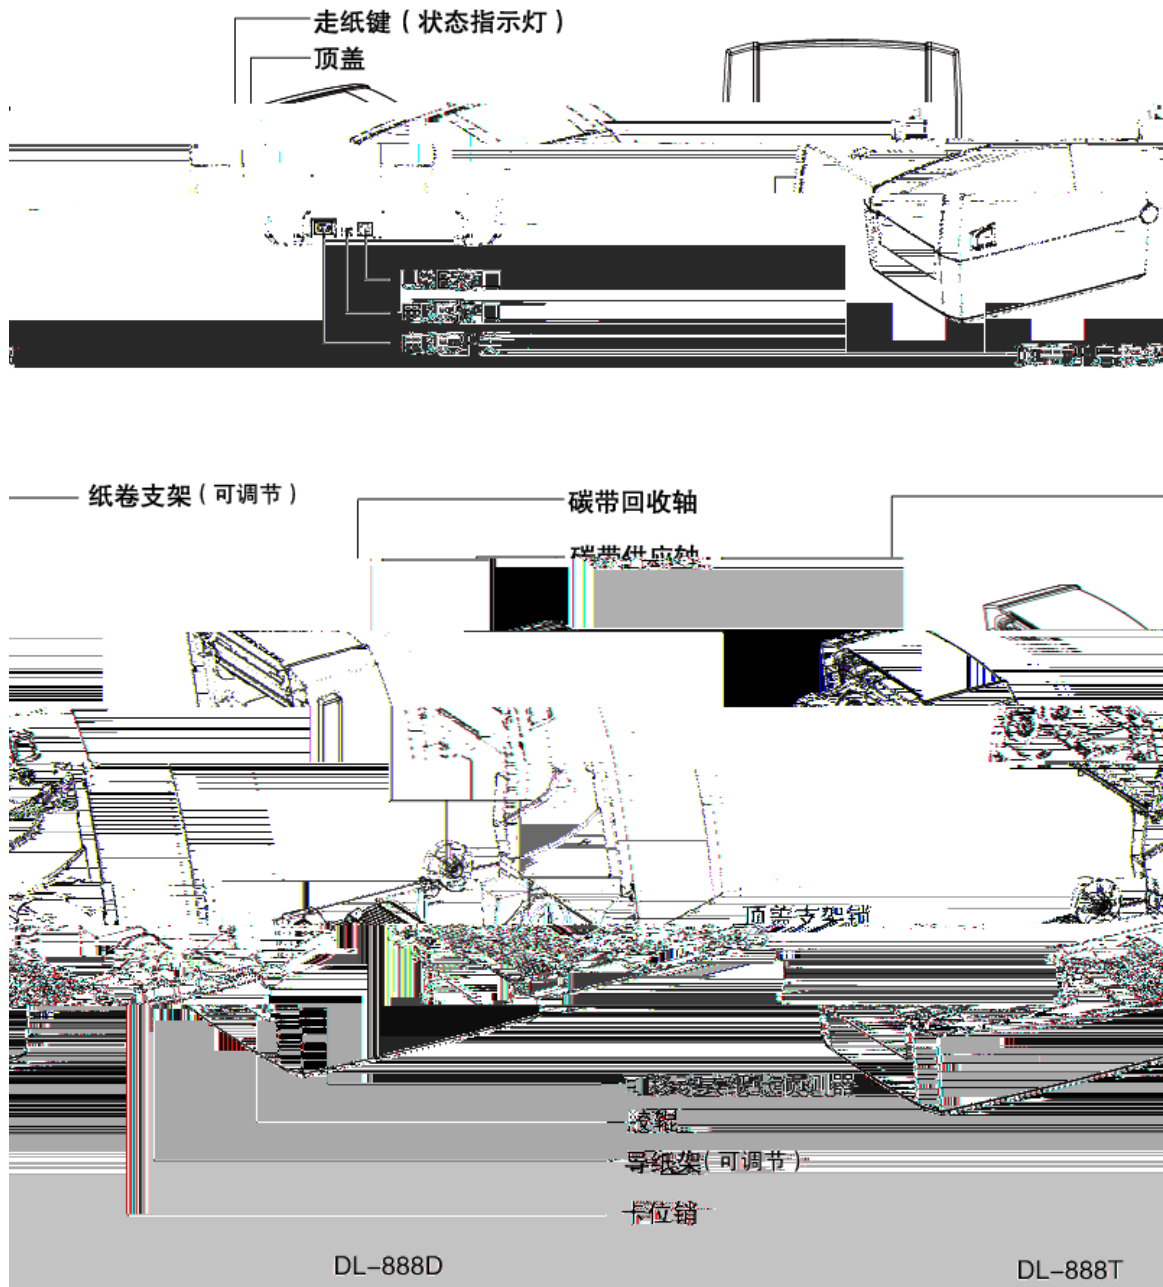

1.3

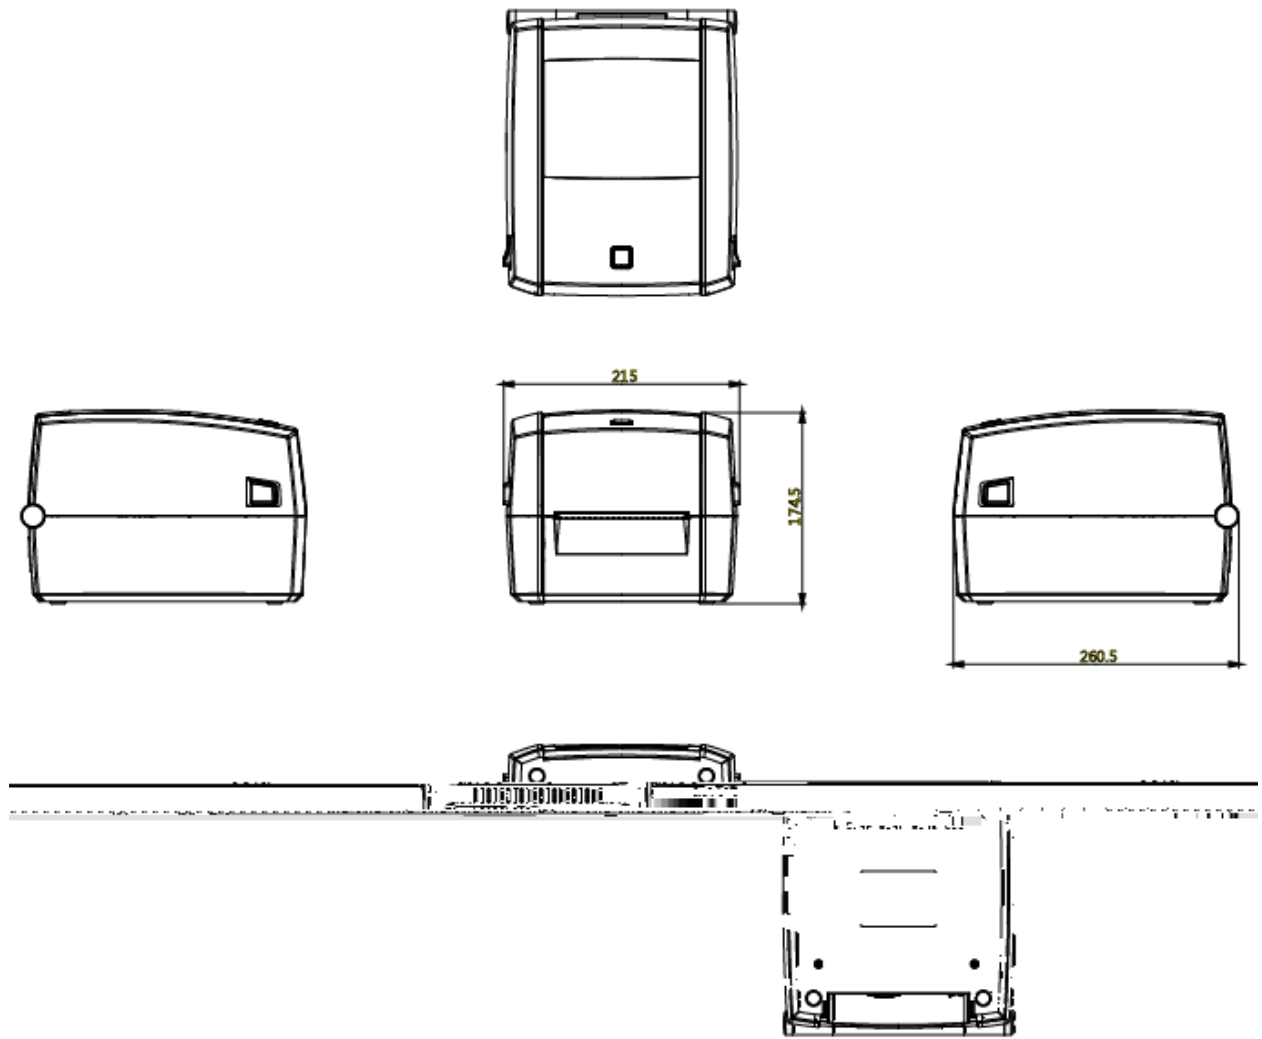

2

(2/1)

		/
		203 / (8 /)
		102 /
		108
		15 - 300
		32 RISC CPU
	RAM	2MB
		2MB
		, , , ,
		,
		1.38 (35) 4.65 (118)
		0.003 (76.2) 0.007 (177.8)
		5 (127)
		0.5 (12.7),1 (25.4),1.5 (38.1)
	2£	, ,

DL-888T

(2/2)

	CCC,FCC,CE

3

3.1


DL-888D

3.1.1


1.




2.

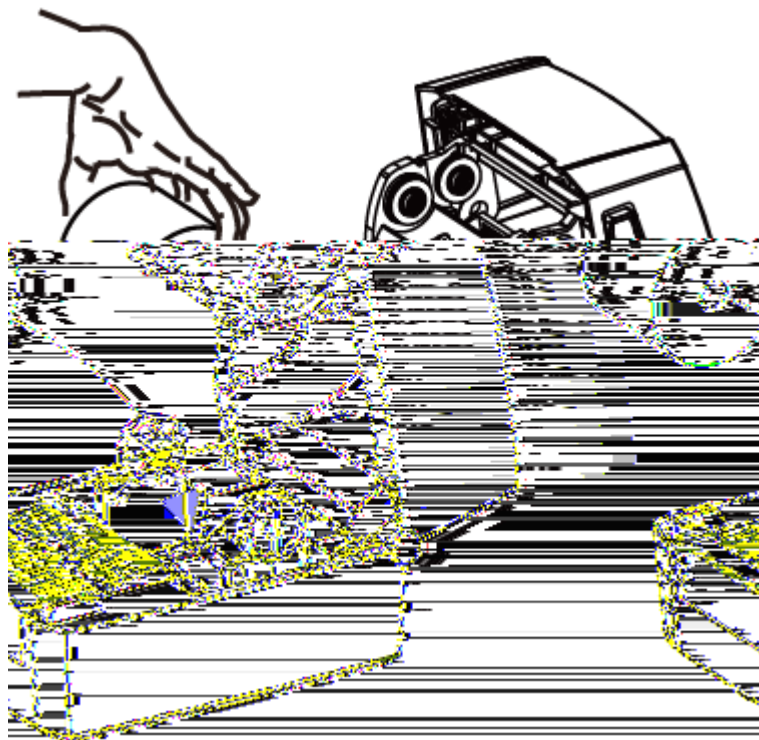

5.

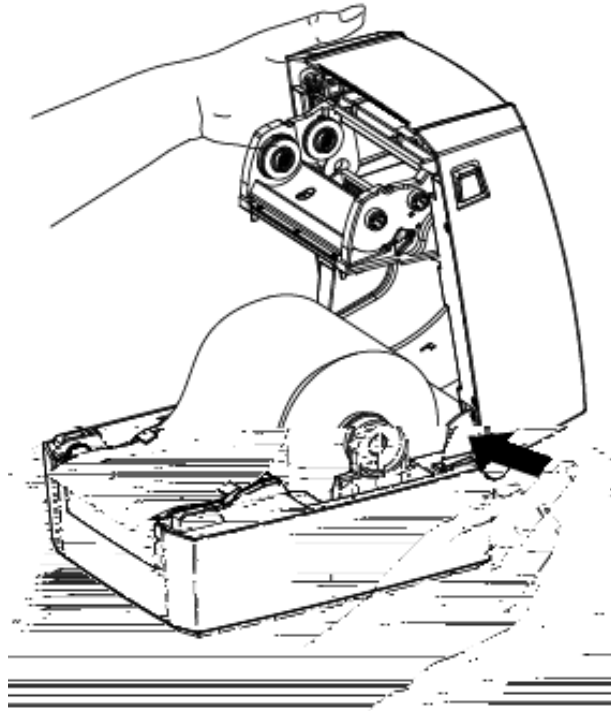


6.

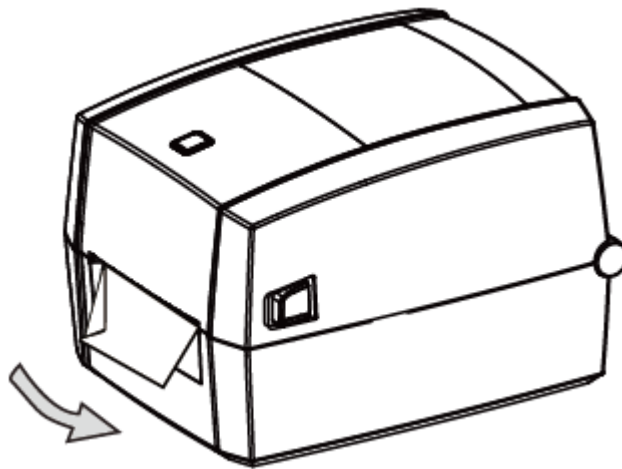


3.1.2


1.

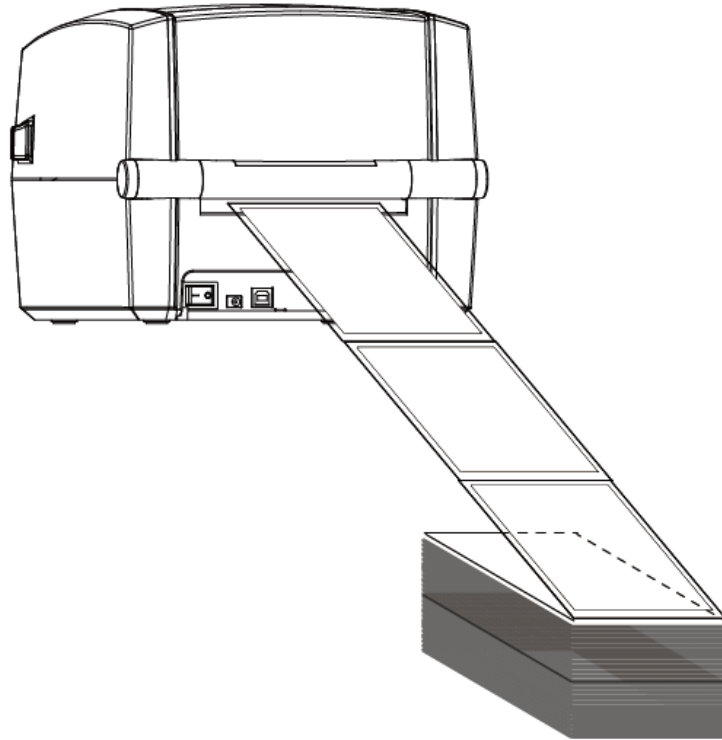


2.

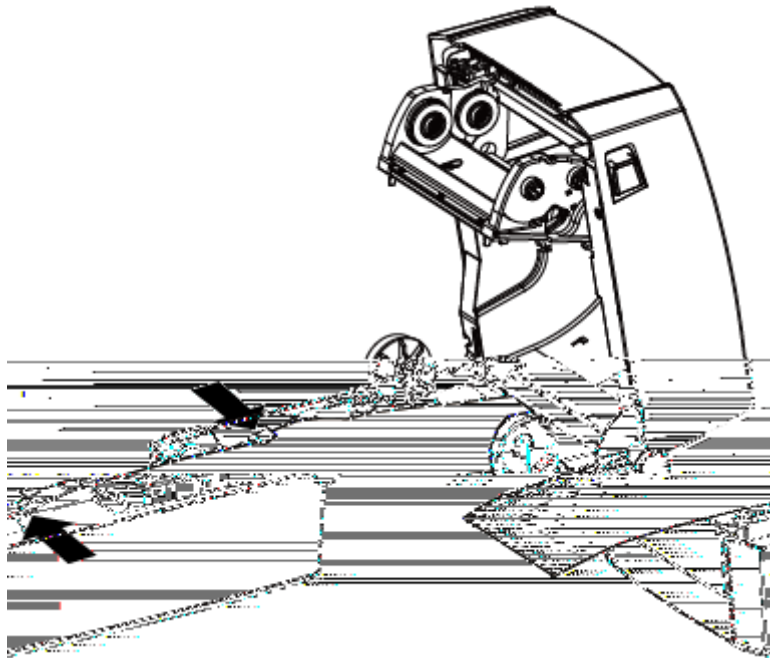



3.

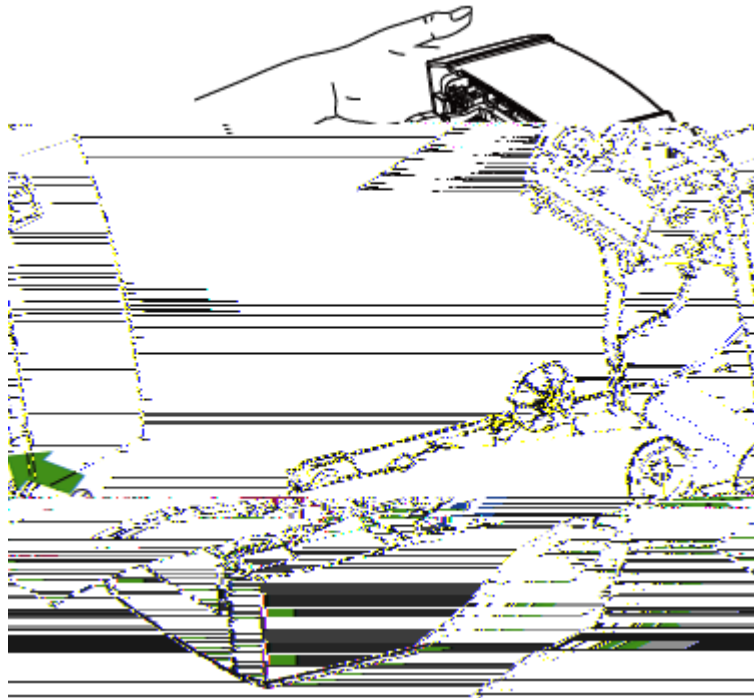

4.

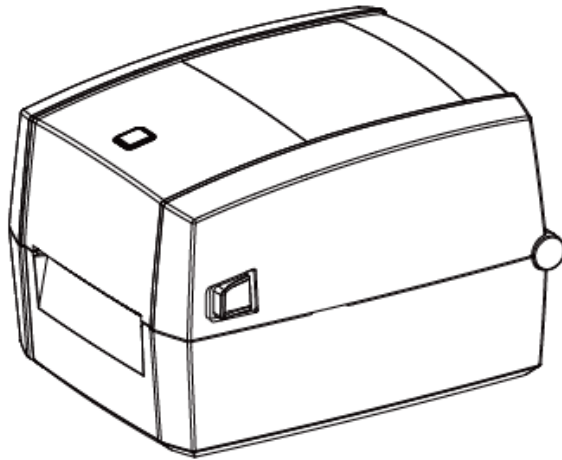


3.1.3

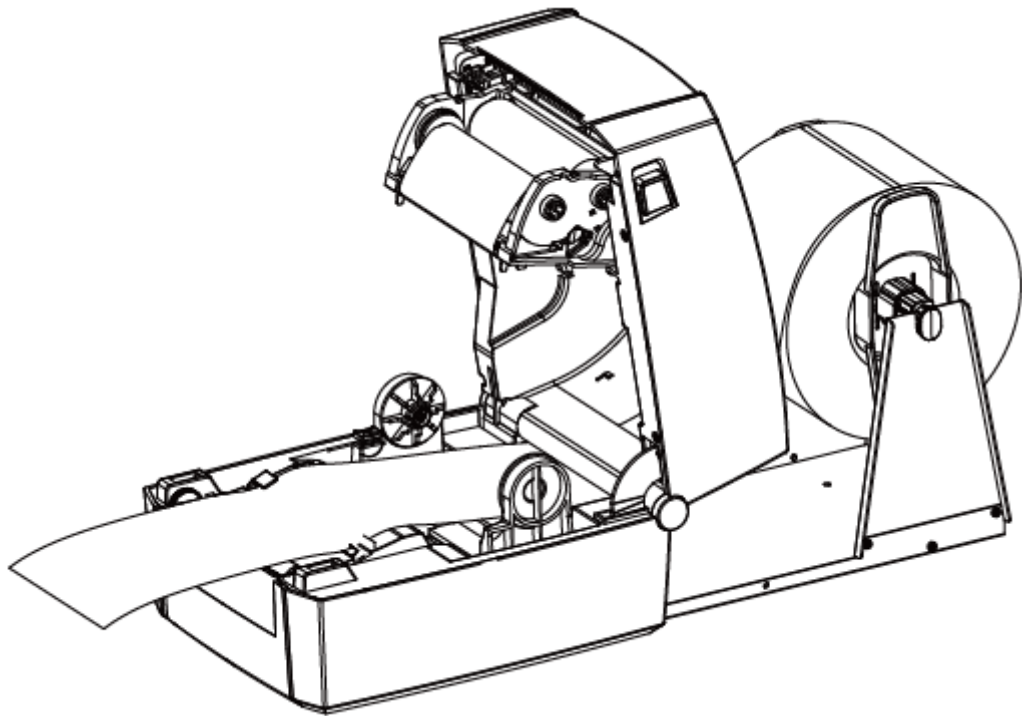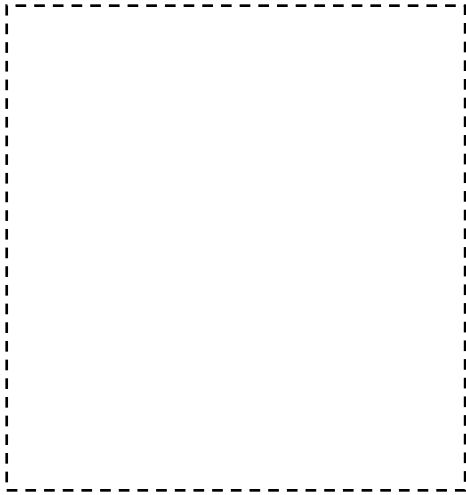


3.1.4 (DL-888T)


1.

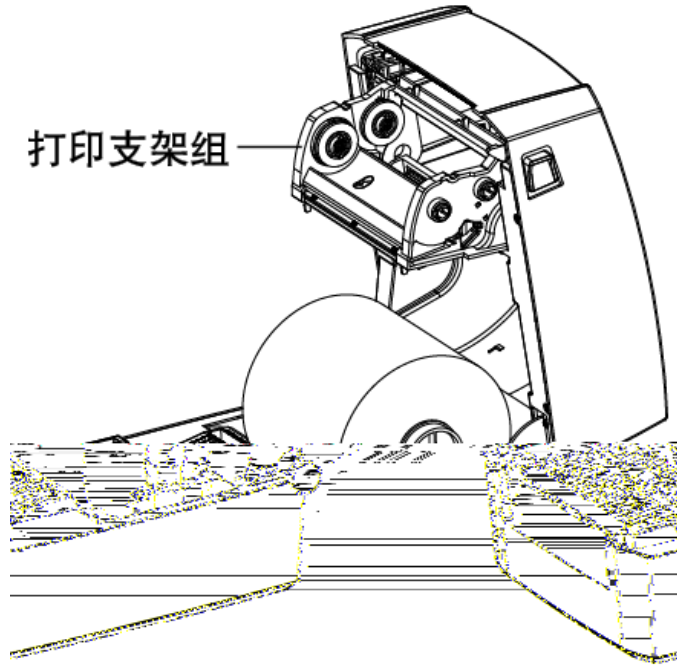


2.

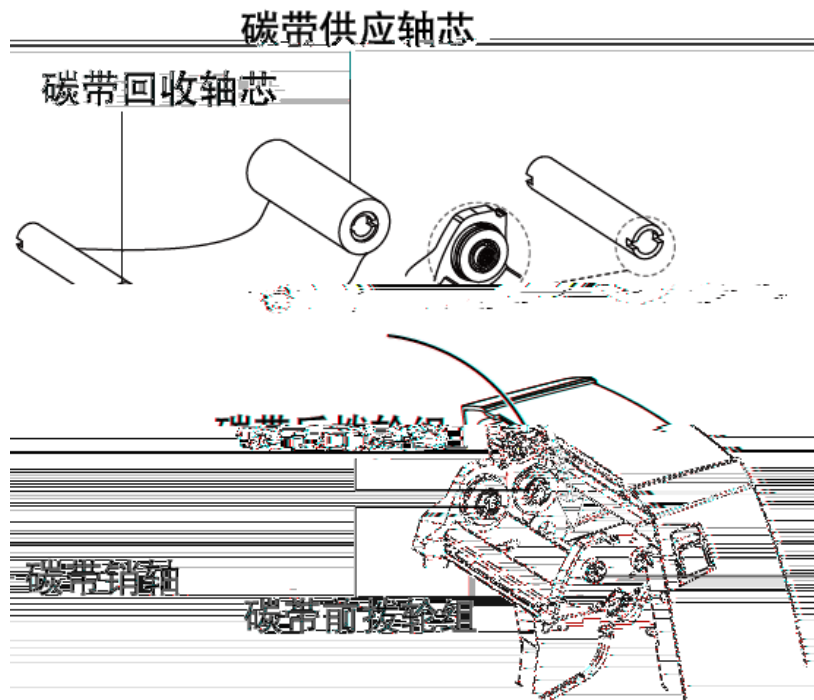

3.

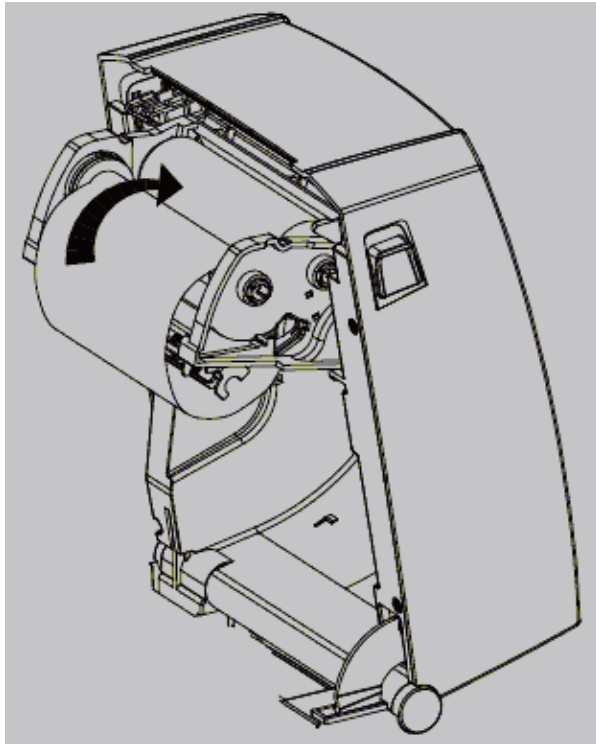


4.

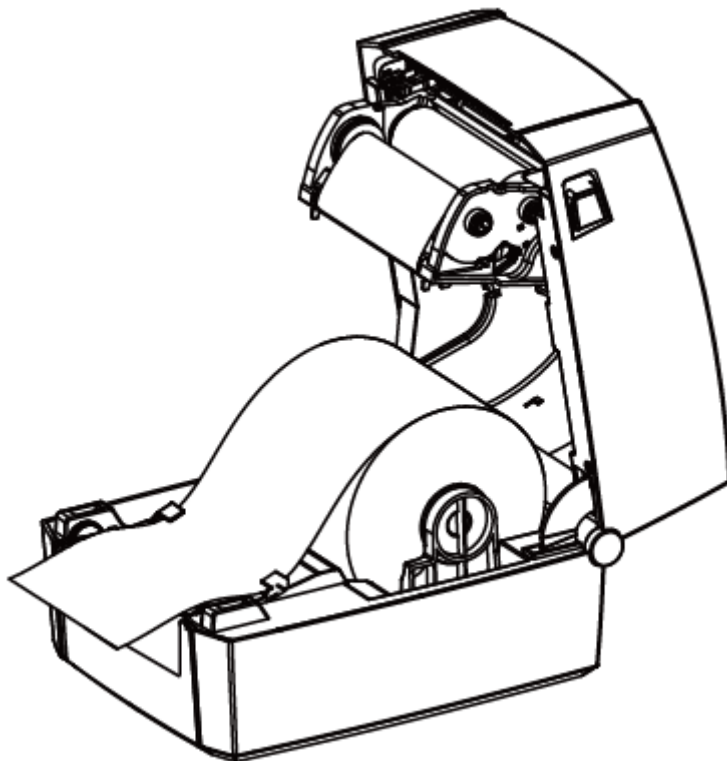


3.2

1. (O)
- 2.
- 3.
- 4.

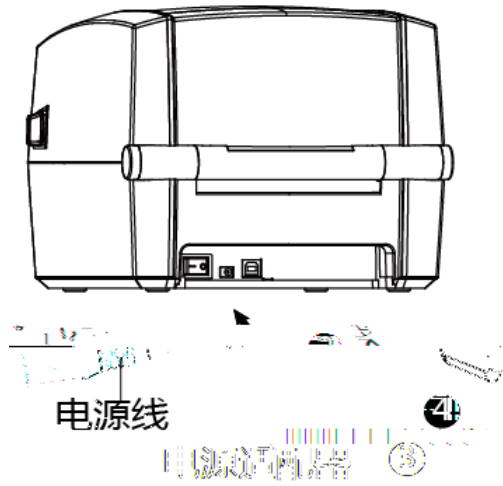

关	开

1

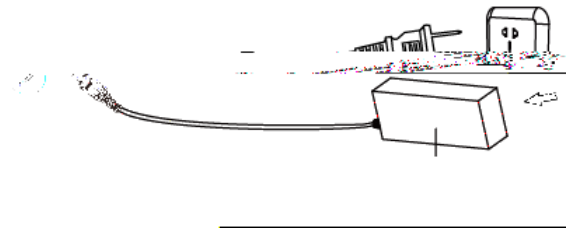


- -
 -
- :

80mm

3.3

--USB B-Type

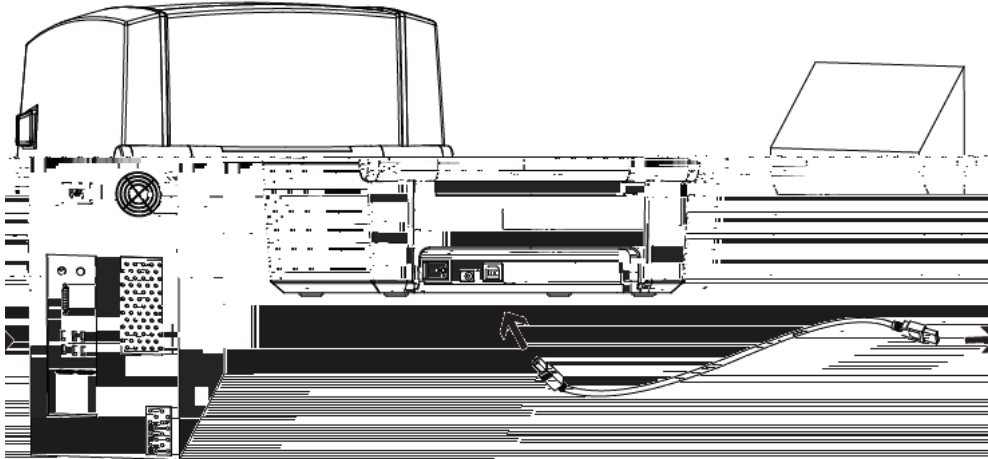


1 (O)

2)

-- USB USB B-Type

3.4

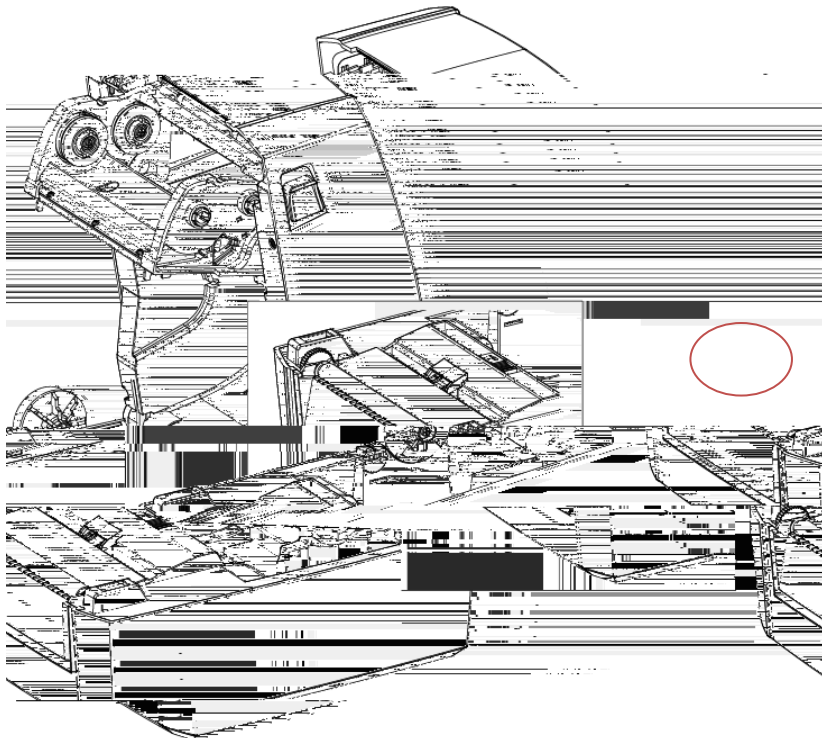

3.5


-

-

-

- 1.

- 2.



3.6

3.6.1 /

O 1

3.6.2

3.6.3


- 1)
- 2)
- 3)

- 1) Windows
Windows
- 2) Windows
- 3) Windows

3.6.4




58mm 80mm

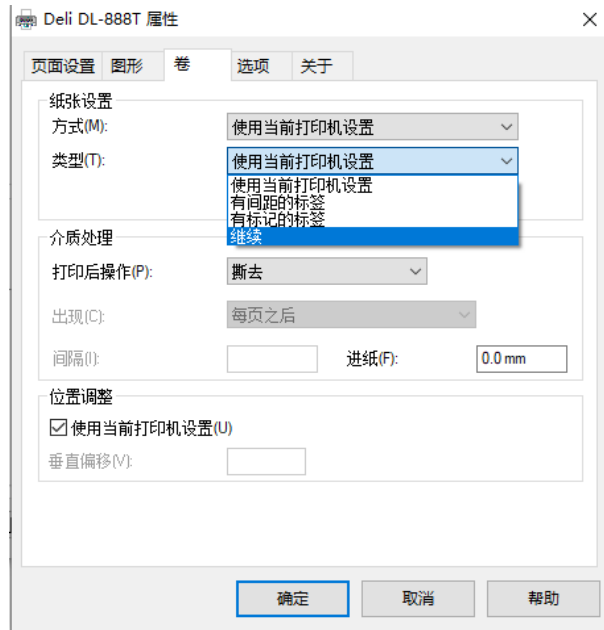

BarTender


2

2mm 3mm

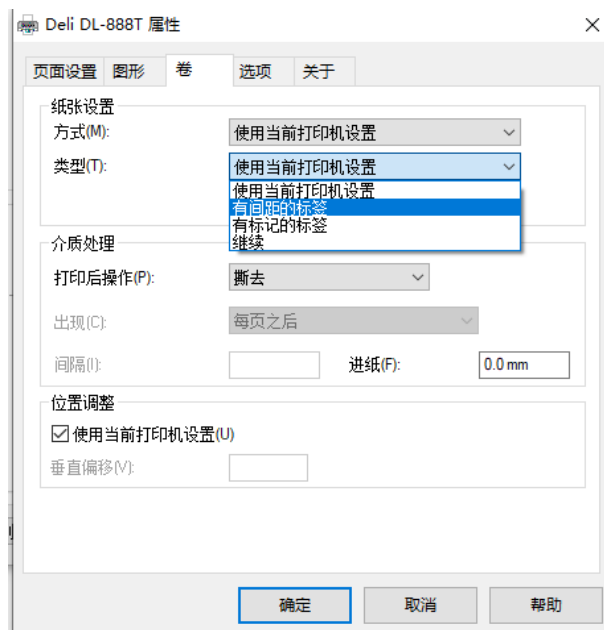


BarTender

3

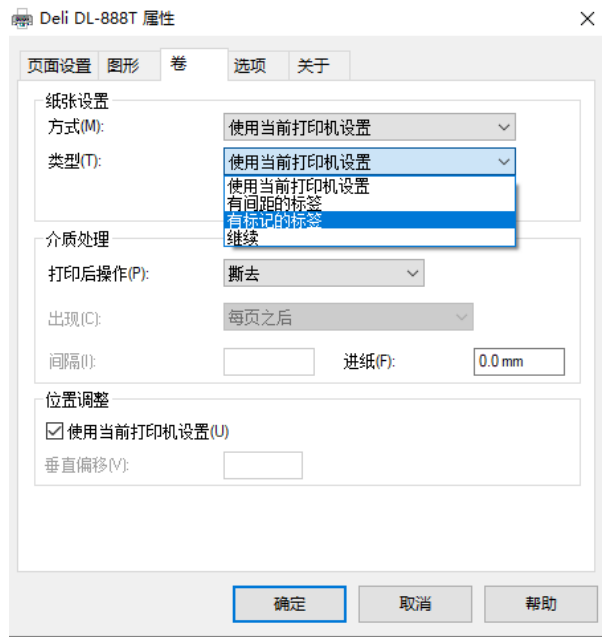

BarTender

4



1	VBUS
2	D-
3	D+
4	GND

1:

1

--	--

Pb

Hg

Cd

Cr VI